







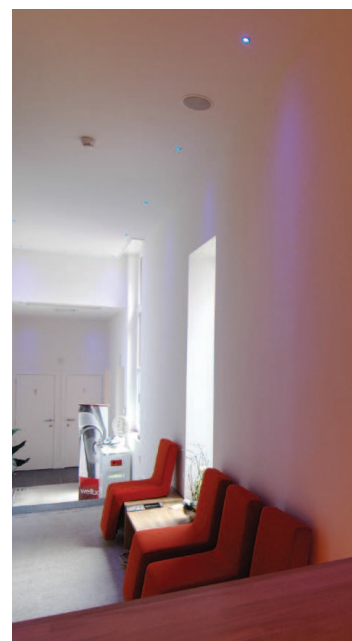
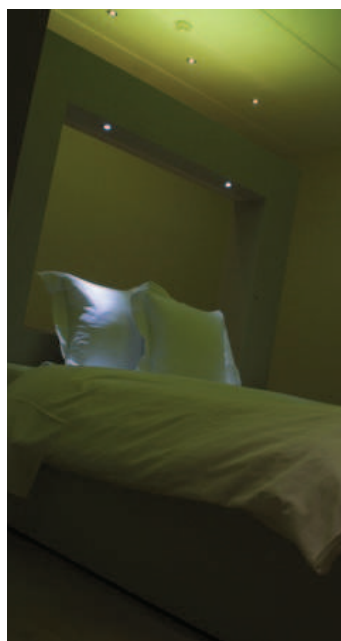
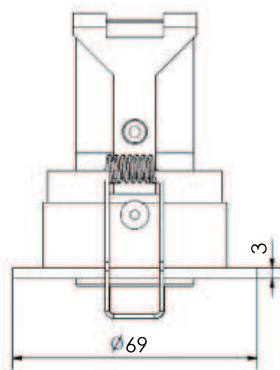
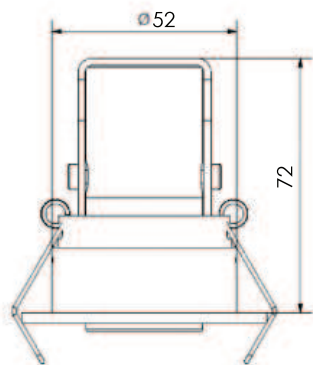
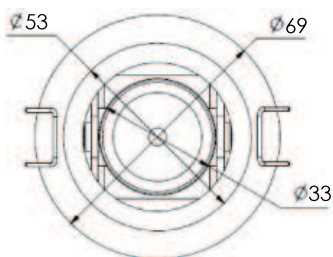
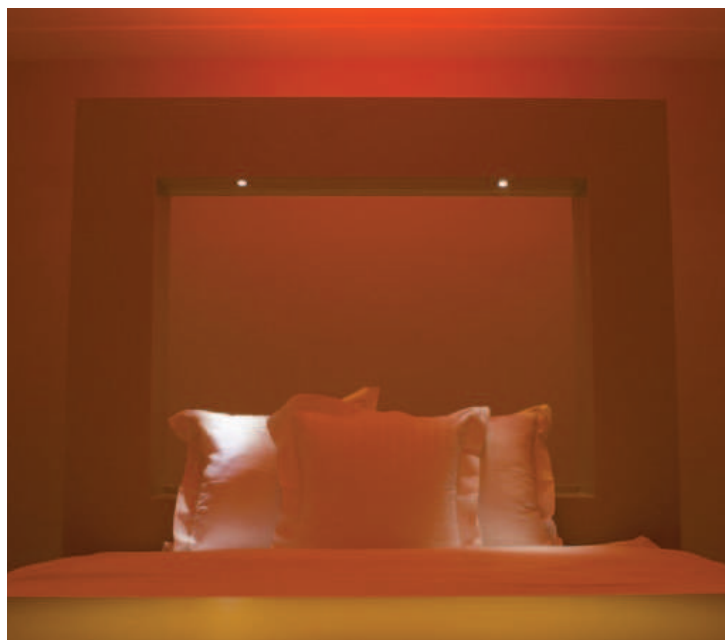


Beamer Insert Adjustable

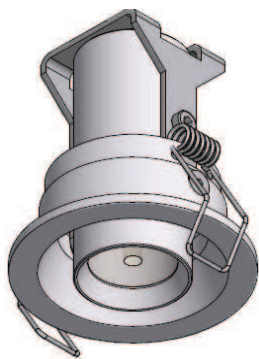

-  Anodised
-  IP 20
-  Smart 3 channel drive 350 mA
-  Mono: X-leds 350/700 mA
RGB: 12/24/48 V DC
-  Mono: 1 x 2.5 W
RGB: 1 x 3.25 W
-  Smart 3 channel drive 700 mA
-  D: 54
H: 90

 RJ45 connector
Standard for RGB devices



Colour Beam Temp. Angle	Red	Green	Blue	Amber	3000 K	4000 K	6300 K	RGB
10°	316151212	316151312	316151512	316151612	316155212	316155312	316155812	-
30°	316171212	316171312	316171512	316171612	316175212	316175312	316175812	316172112