


Beamer Semi Carré



Anodised



IP 20



Smart 3 channel drive 350 mA



Mono: X-leds 350/700 mA
RGB: 12/24/48 V DC




Mono: 1 x 2.5 W
RGB: 1 x 3.25 W






Smart 3 channel drive 700 mA



D: 37
H: 45



RJ45 connector
Standard for RGB
devices

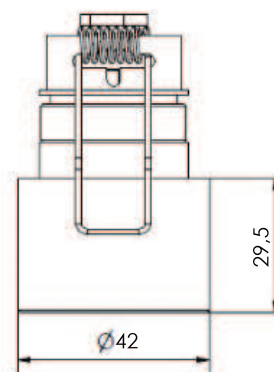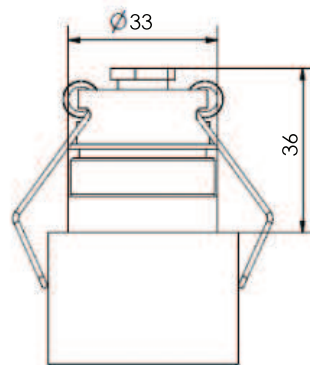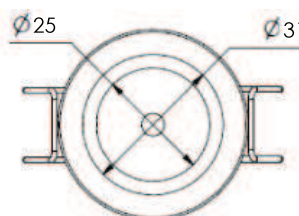

Colour Beam Angle	Red	Green	Blue	Amber	3000 K	4000 K	6300 K	Temp.	Temp.
10°	314251212	314251312	314251512	314251612	314255212	314255312	314255812	-	-
30°	314271212	314271312	314271512	315271612	314275212	314275312	314275812	314272112	314272112