








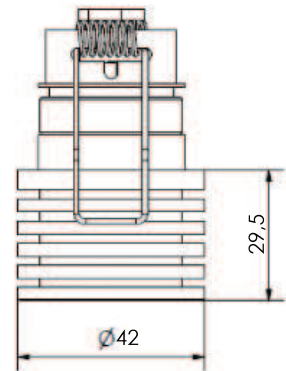
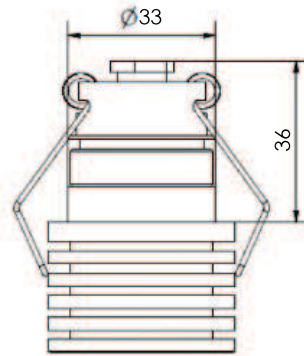
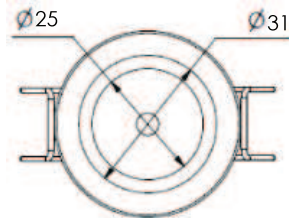


Beamer Semi Disc



-  Anodised
-  IP 20
-  Smart 3 channel drive 350 mA
-  Mono: X-leds 350/700 mA
RGB: 12/24/48 V DC
-  Mono: 1 x 2.5 W
RGB: 1 x 3.25 W
-  Smart 3 channel drive 700 mA
-  D: 37
H: 45
-  RJ45 connector
Standard for RGB devices



Colour Beam Angle	Red	Green	Blue	Amber	3000 K	4000 K	6300 K	RGB
10°	314551212	314551312	314551512	314551612	314555212	314555312	314555812	-
30°	314571212	314571312	314571512	314571612	314575212	314575312	314575812	314572112