








Beamer Up/Down

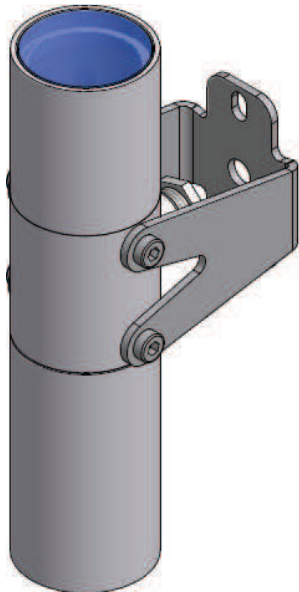






-  Anodised
-  IP 65
-  Smart 3 channel drive 350 mA
-  Mono: X-leds 350/700 mA
RGB: 12/24/48 V DC
-  Mono: 2 x 2.5 W
RGB: 2 x 3.25 W
-  Smart 3 channel drive 700 mA

 RJ45 connector
Standard for RGB devices

Housing Beamer Up/Down
number 25307002

Option: Surface box 60x60x25
Order Number: 011250002
(See Accessories)

Option: Surface box 60x60x40
Order Number: 011270002
(See Accessories)

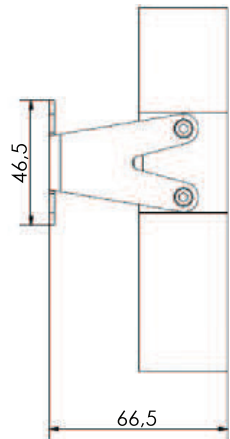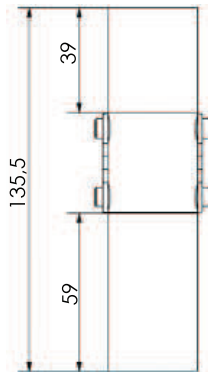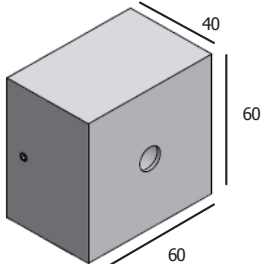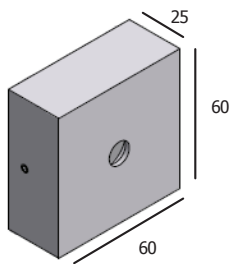

Colour Beam Temp. Angle	Red	Green	Blue	Amber	3000 K	4000 K	6300 K	RGB
10° Up	253111212	253111312	253111512	253111612	253115212	253115312	253115812	-
30° Up	253131212	253131312	253131512	253131612	253135212	253135312	253135812	253132112
10° Down	253151212	253151312	253151512	253151612	253155212	253155312	253155812	-
30° Down	253171212	253171312	253171512	253171612	253175212	253175312	253175812	253172112