







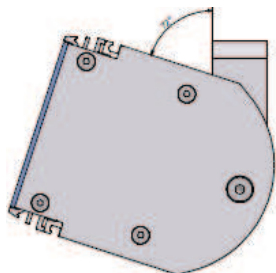


Coveline Super L 500 / 1000

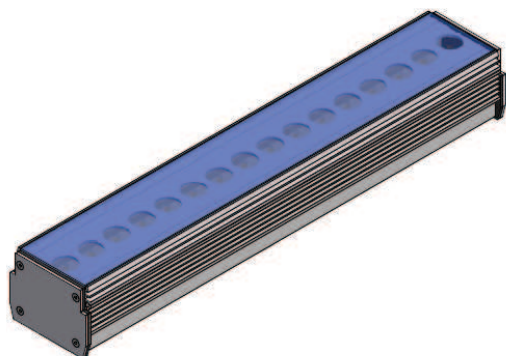






-  Anodised
-  IP 20
-  Drive built in
Control trough external DMX
-  Mono: 230 V AC
RGB: 12/24/48 V DC
-  L 500 Mono: 16 x 2.5 W
RGB: 16 x 3.25 W
-  L 1000 Mono: 32 x 2.5 W
RGB: 32 x 3.25 W
-  Dimmer built in if required
Control trough external DMX

Option: Orientable assembly
Order Number: (See Accessories)



Option: Coveline super L surface bracket
Order Number: 01272002 (See Accessories)

Option: Coveline super L wall bracket
Order Number: 012700002 (See Accessories)

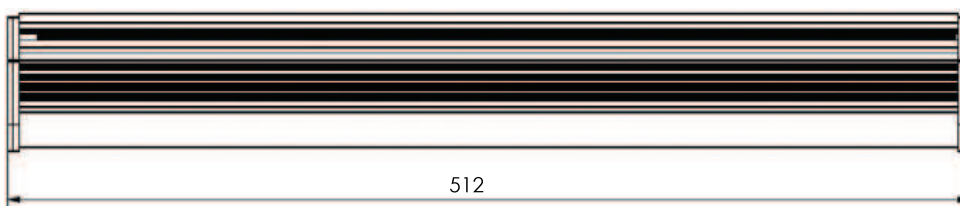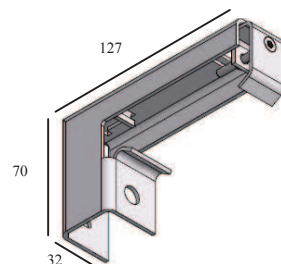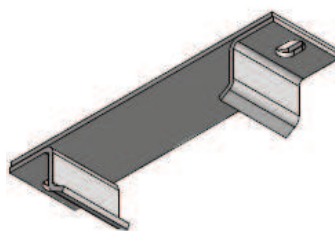

Colour Beam Angle \ Temp.	3000 K	4000 K	6300 K	RGB
L 500 - 10°	113701002	113701902	113701102	-
L 500 - 30°	113801002	113801902	113801102	113802102
L 1000 - 10°	113721002	113721902	113721102	-
L 1000 - 30°	113821002	113821902	113821102	113822102