










# Marker T



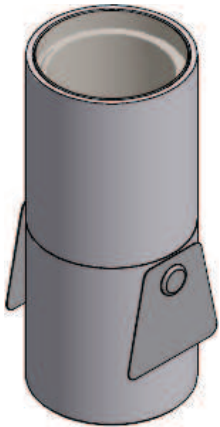


-  Anodised
-  IP 67
-  Smart 3 channel drive 350 mA
-  Mono: X-leds 350/700 mA  
RGB: 12/24/48 V DC
-  Mono: 1 x 2.5 W  
RGB: 1 x 3.25 W
-  Smart 3 channel drive 700 mA
-  D: 37 mm  
H: 90 mm

Option: Putter Floor recessed box  
Order Number: 015040000  
(See Accessories)



 RJ45 connector  
Standard for RGB devices

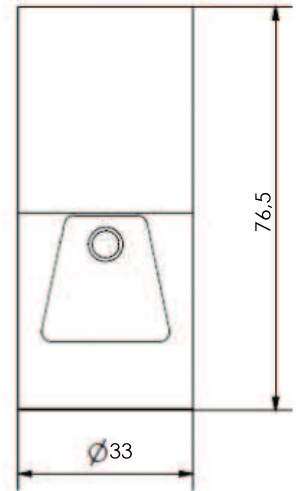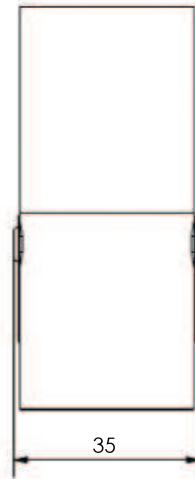

Colour Beam Angle	Red	Green	Blue	Amber	3000 K	4000 K	6300 K	RGB
120°	576551222	576551322	576551522	576551622	576555222	576555322	576555822	576552122