








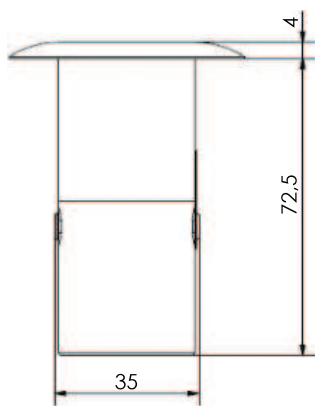


Putter



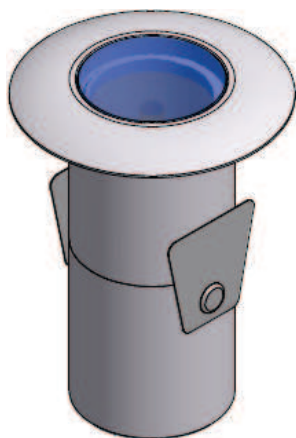


-  Anodised
-  IP 67
-  Smart 3 channel drive 350 mA
-  Mono: X-leds 350/700 mA
RGB: 12/24/48 V DC
-  Mono: 1 x 2.5 W
RGB: 1 x 3.25 W
-  Smart 3 channel drive 700 mA
-  D: 37 mm
H: 75 mm

 RJ45 connector
Standard for RGB devices



Option: Putter Floor recessed box
Order Number: 015040000
(See Accessories)

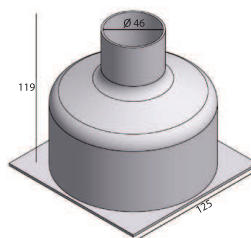

Colour Beam Temp. Angle	Red	Green	Blue	Amber	3000 K	4000 K	6300 K	RGB
10°	557051212	557051312	557051512	557051612	557055212	557055312	557055812	-
30°	557071212	557071312	557071512	557071612	557075212	557075312	557075812	557072112